Meclift™ ML36CMt

ML36CMt

Manufacturer	Oy Meclift Ltd, Finland
Type	ML36CMt
Standard colors	Orange, Blue and Black
Lifting properties	
Lifting capacity	36,000 kg
Lifting height	1,900 m
Lifting speed	0.1 m/s (depending on the tractor)
Dimensions	
Length *(wo terminal tractor)*	10,000 mm
Width	4,123 mm
Height *(min)*	4.000 mm
Heigth *(max)*	5,900 mm
Ground clearance	350 mm
Weight *(wo terminal tractor)*	21,500 kg
Technical specifications	
Driving speed	25 km/h
Tyres	2x16.00-25

Options
- Automatic central lubrication
- LED lights
- Cameras & display
- Stand
- Other options available on request



MEC LIFT

Container Mover
- Tilter

Container Mover



Oy Meclift Ltd
Hepolamminkatu 51
FI-33720 Tampere, Finland
Tel +358 20 743 1120
Fax +358 20 743 1121
sales@meclift.fi
www.meclift.fi

The manufacturer reserves the right to make changes in technical spesifications as a result of product development
Our products are protected by several worldwide patents.
Meclift 2016

Container Tilter

Meclift.fi

Meclift™ ML36CMt

Container Mover

With Meclift™ ML36CMt you can do moving and unloading of bulk material containers efficiently and safely.


ML36CMt is ideal for bulk material containers, due to its tilting feature. It moves and unloads 20' bulk material containers without any additional equipment. Tilting angle is 42°. It fits through narrow terminal doors and under bridges in road traffic.

The ML36CMt is a cost effective solution for terminal areas and locations, where there is a need to move containers from place A to place B and unload them.


It can be attached to practically with any terminal tractor brand. Work safety is very good with forward visibility from the terminal tractors' cabin. Safety can be significantly improved by utilization of the two direction seating from the terminal tractor.


ML36CMt is powered by the terminal tractors' hydraulics. The height of the machine can be raised and lowered for loading and unloading containers on trailers, loading plates or on the ground. Front and rear twist-locks can be separately adjusted sideways to grip the container.

The loading of bulk material to containers can be done with Meclift™ Variable Reach Trucks, i.e. ML1612R.

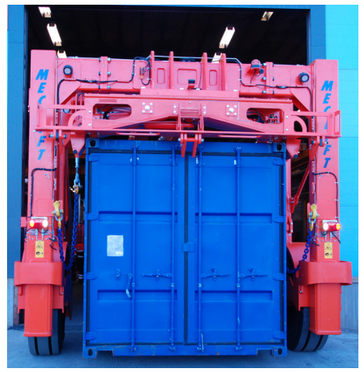



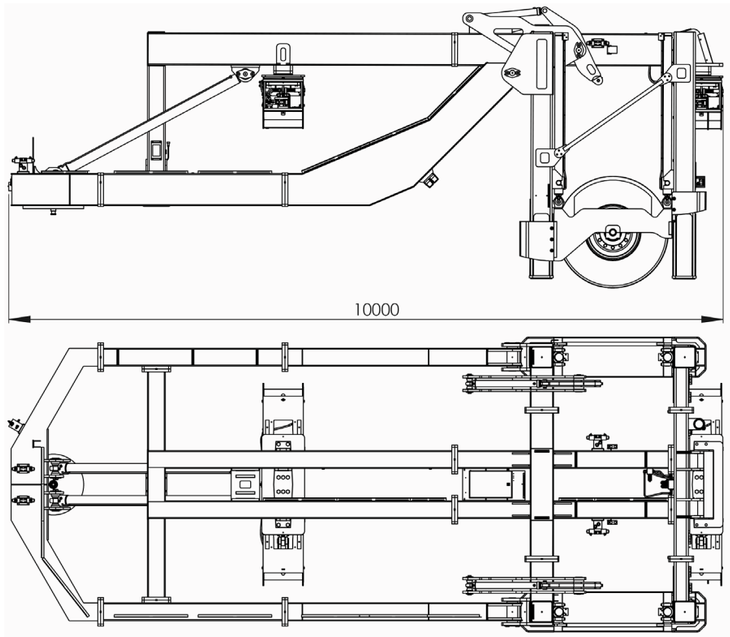

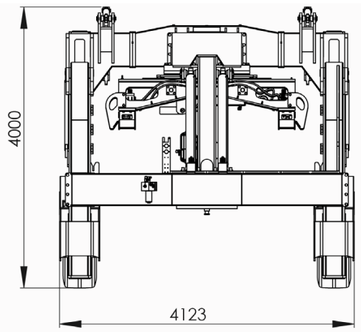











Unloading bulk material containers safely

Meclift.fi